Unified Communications (UC) Quick Start

INSTALLATION

Desktop

TO INSTALL managedIP UC ON YOUR DESKTOP

- 1. Go to http://support.tdsmanagedip.com/hosted.html
- 2. Click Applications.
- 3. Select **Download** and follow instructions.
- 4. Launch managedIP UC and login.



NOTE: Your login credentials for managedIP UC are the same as your managedIP Hosted Web Portal username and password.

- 5. Click Sign In.
- 6. Acknowledge E911 Disclosure, Click OK.

Mobile

TO INSTALL managedIP UC ON YOUR MOBILE DEVICE:

- 1. Go to Google Play or the Apple App Store.
- 2. Search "TDS managedIP UC" and Select.
- 3. Select **Download** and follow the instructions.
- 4. Launch managedIP UC and login.
- 5. Click Sign In.
- 6. Acknowledge E911 Disclosure, Click OK.
- 7. Select Call Settings.
- 8. Enable **Call Through Service** by configuring:
 - Anywhere & This Phone Number (Android)
 - Anywhere & iPhone Number (iPhone)

Logging In

TO LOGIN TO managedIP UC:

- 1. Launch the application.
- 2. Go to the Sign-in window and Click OK.




NOTE: Automatic login can be enabled to Sign-in automatically and arrive at your Contact List. The username most recently used is automatically remembered. In addition, you can enable managedIP UC to remember your password.



Unified Communications (UC) Quick Start

USER INTERFACE - DESKTOP

When you start the client for the first time, your contact list is empty. You can use the search and dial field to find people and then directly add them from the search results to populate your Contact List. You can also manually add contacts using the Add Contact button. Learn what each icon means in the right key below.

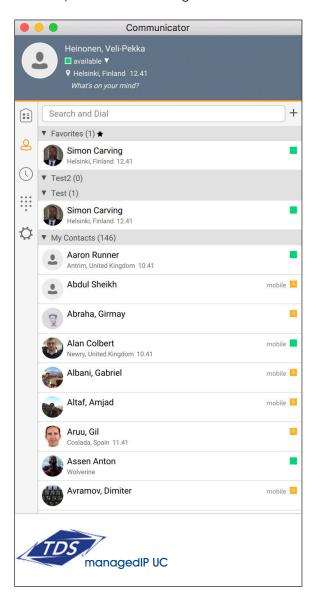

Icon	Usage	
	My Information – View and update your information, for example, your presence, avatar, and location.	
8	Contacts – View your contacts.	
:	$\label{eq:main_model} \textbf{My Room} - \text{This is your permanent communication room. Participants can dial in to your audio bridge.}$	
0	Communications History – View previous chats and calls.	
(III)	Full Enterprise Directory – Show all contacts of the directory.	
₩	Dial Pad – Make calls (it is integrated with the Main window).	
≎	Preferences – Use for quick access to preferences and call settings such as Call Forwarding.	
=	Chat - Start an instant message conversation with a selected contact.	
•	Call – Make an IP audio call to a selected contact.	
8	Call from Phone — Make a Click To Dial call from your desk phone (or secondary device).	
	Video Call - Make a video call to a selected client (VoIP).	
Ç	Share - Share either the whole screen or an individual application.	
=	Menu – Open communications options.	
+	Add – Add a contact, group, or conference.	



Unified Communications (UC) Quick Start

USER INTERFACE - MOBILE




Audio and Video Calls

YOU CAN MAKE AUDIO AND VIDEO CALLS FROM:


- Contact List
- Contact Card
- Call History
- Dialer



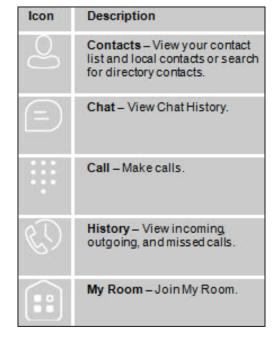

User Interface - Desktop DURING A CALL YOU CAN:

- Adjust the volume
- Chat
- Mute the microphone
- Desktop share
- Put a call on hold
- Transfer
- Conference
- Call park
- Add video

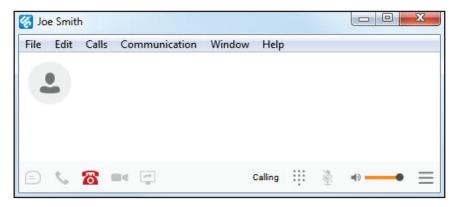




Unified Communications (UC) Quick Start


CONFIGURE CALLING FEATURES - MOBILE

- Call Forwarding
- Simultaneous Ring
- Anywhere
- Do Not Disturb

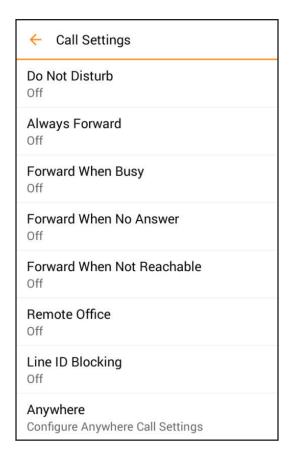

CONFIGURE PREFERENCES - DESKTOP

- Sign In
- Audio
- Video
- Call Settings
- Outlook Integration

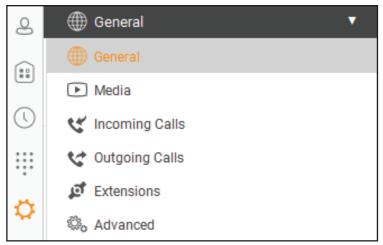

PRESENCE ICON + DESCRIPTION

Icon	What it means
available	The green availability icon indicates that the user is online and is ready for communication.
mobile	The green availability icon indicates that the user is online on the Communicator mobile client and is ready for communication. The icon is accompanied by the text "mobile".
away	The yellow availability icon indicates that the user is online on their Communicator client but has been idle or away from their computer for more than 10 minutes.
offline	The grey availability icon indicates that the user is offline in a call and the only available contact method is calling or leaving a chat message.
pending	The question mark indicates that a subscription is pending and the contact has not yet approved sharing their availability.
/// busy	The red availability icon indicates that the user is busy and does not want to be disturbed. $ \\$
///call	This icon indicates that the contact is busy due to a call. This is an automated availability status.
## meeting	This icon indicates that the contact is busy due to a meeting. This is an automated availability status. The Busy – In Call status overrides the Busy – In Meeting status so this icon is only seen when there is a meeting but no call.

